

eurobond



Europanel F5 Extra 125mm insulated wall panel system

Environmental Product Declaration

Owner of the Declaration: Euroclad Group Ltd, Cardiff, CF3 2ER
Programme Operator: Tata Steel UK Limited, 30 Millbank, London, SW1P 4WY



CONTENTS

1	General information	03
2	Product information	04
2.1	Product Description	04
2.2	Manufacturing	04
2.3	Technical data and specifications	06
2.4	Packaging	06
2.5	Reference service life	06
3	Life Cycle Assessment (LCA) methodology	07
3.1	Declared unit	07
3.2	Scope	07
3.3	Cut-off criteria	08
3.4	Background data	08
3.5	Data quality	08
3.6	Allocation	08
3.7	Additional technical information	09
3.8	Comparability	09
4	Results of the LCA	10
5	Interpretation of results	12
6	References and product standards	13

Europanel F5 Extra 125mm insulated wall panel system
Environmental Product Declaration
(in accordance with ISO 14025 and EN 15804)

This EPD is representative and valid for the specified (named) product

Declaration Number: EPD-TS-2018-003
Date of Issue: 1st August 2018
Valid until: 31st July 2023

Owner of the Declaration: Euroclad Group Ltd, Cardiff, CF3 2ER
Programme Operator: Tata Steel UK Limited, 30 Millbank, London, SW1P 4WY

The CEN standard EN 15804:2012+A1:2013 serves as the core Product Category Rules (PCR)
supported by Tata Steel's EN 15804 verified EPD PCR documents

Independent verification of the declaration and data, according to ISO 14025

Internal External

Author of the Life Cycle Assessment: Tata Steel UK
Third party verifier: Olivier Muller, PricewaterhouseCoopers, Paris

1 General information

Owner of EPD	Euroclad Group Ltd
Product & Module	Europanel F5 Extra 125mm insulated wall panel system
U-value	0.33W/m ² K
Manufacturer	Tata Steel Europe & Euroclad Group
Manufacturing sites	Port Talbot, Llanwern, Shotton and Cardiff
Product applications	Construction and infrastructure
Declared unit	1m ² of insulated panel system
Date of issue	1st August 2018
Valid until	31st July 2023

This Environmental Product Declaration (EPD) is for Europanel F5 Extra 125mm insulated wall panels manufactured by Euroclad Group Ltd in the UK, using Colorcoat HPS200 Ultra® or Colorcoat Prisma® pre-finished steel and stone wool insulation. The environmental indicators are for products manufactured at Euroclad Group Ltd in Cardiff with feedstock supplied from Shotton.

The information in the Environmental Product Declaration is based on production data from 2013 and 2016

EN 15804 serves as the core PCR, supported by Tata Steel's EN 15804 verified EPD programme Product Category Rules documents, and this declaration has been independently verified according to ISO 14025 ^[1,2,3,4,5,6,7].

Third party verifier



Olivier Muller, PwC Stratégie - Développement Durable, PricewaterhouseCoopers Advisory,
63, rue de Villiers, 92208 Neuilly-sur-Seine, France

2 Product information

2.1 Product Description

The Europanel Extra product from Euroclad Group Ltd is a composite, architectural wall panel system comprising of a Colorcoat® pre-finished steel liner profile, a dense stone wool insulation core and a Colorcoat® pre-finished steel external weathering profile. The stone wool insulation core has a fire performance approved by both the Loss Prevention Certification Board (LPCB)^[8] and Factory Mutual (FM) Approvals^[9].

2.2 Manufacturing

The manufacturing sites included in the EPD are listed in Table 1 below.

Table 1 Participating sites


Site name	Product	Manufacturer	Country
Port Talbot	Hot rolled coil	Tata Steel	UK
Llanwern	Cold rolled coil	Tata Steel	UK
Shotton	Hot dip galvanised coil	Tata Steel	UK
Shotton	Pre-finished steel	Tata Steel	UK
Cardiff	Insulated panel system	Euroclad Group	UK

The process of steel coil manufacture at Tata Steel begins with sinter being produced from iron ore and limestone, and together with coke from coal, reduced in a blast furnace to produce iron. Steel scrap is then added to the liquid iron and oxygen is blown through the mixture to convert it into liquid steel in the basic oxygen furnace. The liquid steel is continuously cast into discrete slabs, which are subsequently reheated and rolled in a hot strip mill to produce steel coil. The hot rolled coils are transported by rail, from Port Talbot to Llanwern where they are pickled and cold rolled. Following, cold rolling the coil is then transported by train to Shotton where the strip is galvanised and coated.

Pre-finished steel comprises a number of paint layers and treatments which are applied to the steel in an automated and carefully controlled process with each layer of the product having a particular function. It is the combined effect of all these layers that give the product its overall performance and ensures a material that is robust and offers the specifier a choice of colour and effect. During the organic coating process for Colorcoat HPS200 Ultra® and Colorcoat Prisma®, a Galvalloy® metallic coating is first applied to the steel coil. A pre-treatment is applied and then a primer before adding the final top coat layer in the form of liquid paint. For the vast majority of pre-finished steel products, the above topcoats are applied on the top surface only, while the reverse or back side of the strip is produced with a high performing backing coat. These are cured at elevated temperatures before being recoiled prior to use in the manufacture of the insulated panel system.

The pre-finished steel is profiled and cut into suitable lengths on a continuous production line and the solid stone wool core is inserted between the backing or liner sheet and the top or outer sheet. The wool core is adhesively bonded to the steel sheets, and is cured in a heated press to form the insulated panels. An overview of the process from raw materials to transport of the panel product to the construction site, is shown in Figure 1.

Figure 1 Process overview from raw materials to panel product

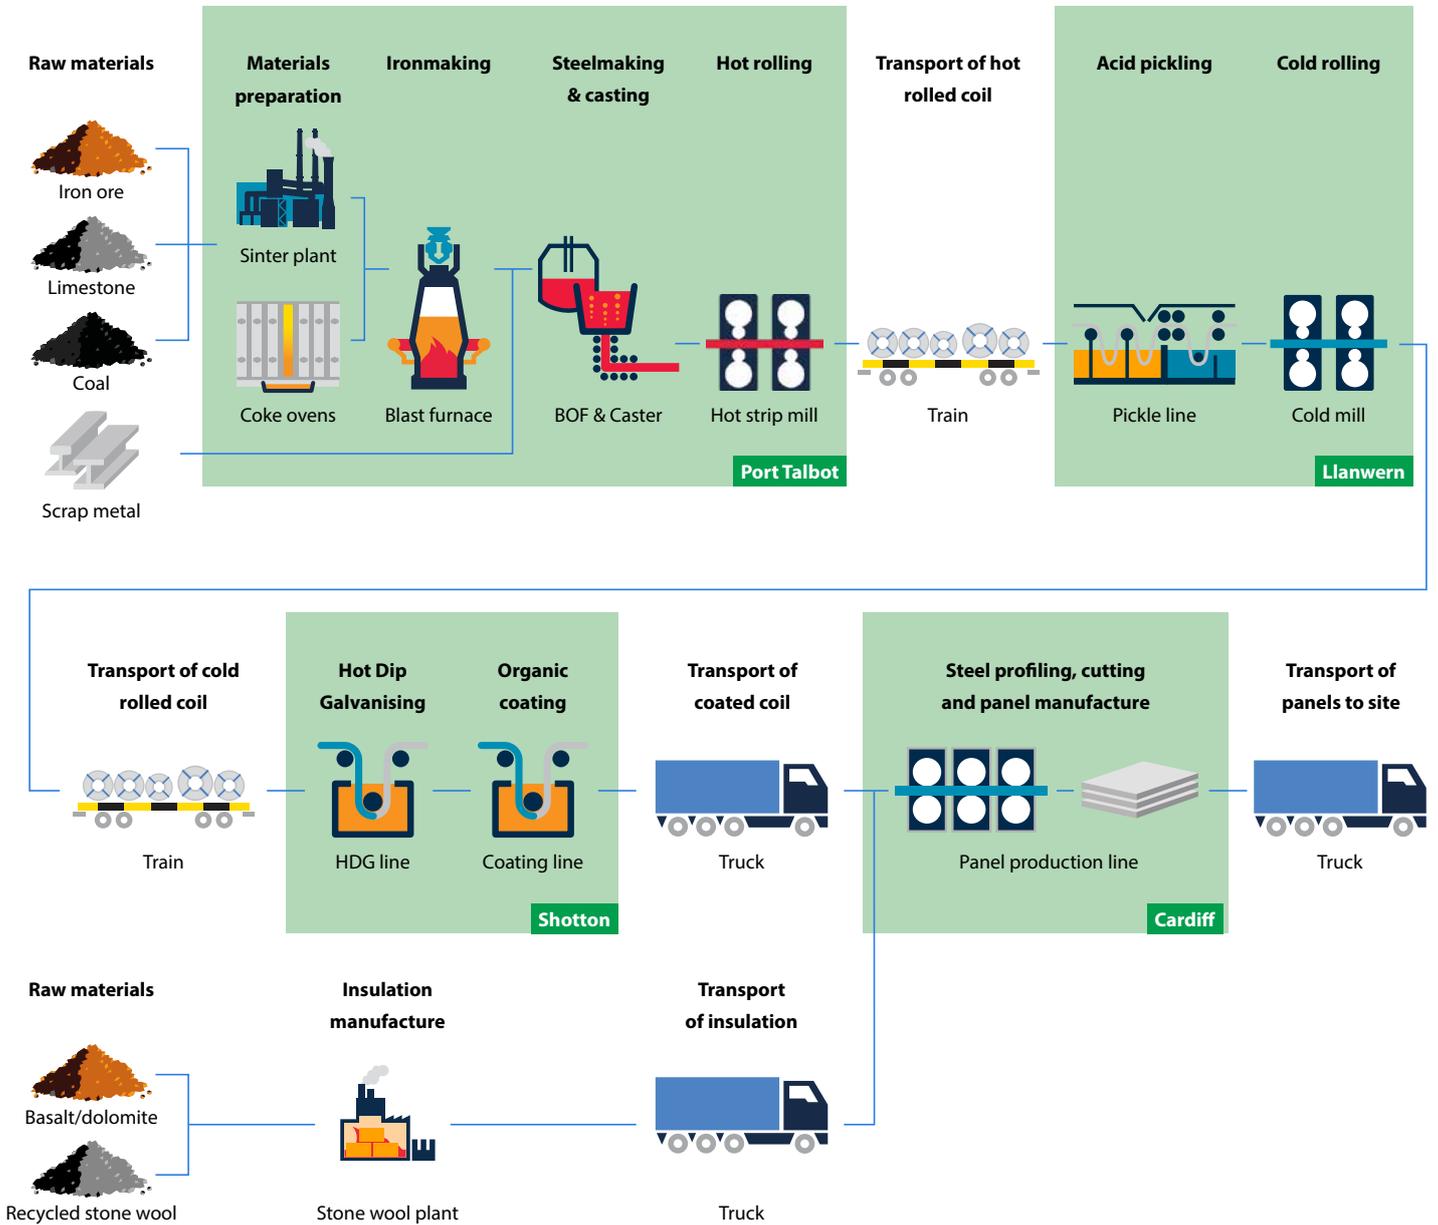

Process data for the manufacture of hot and cold rolled coil at Port Talbot and Llanwern was gathered as part of the latest worldsteel data collection. For Port Talbot and Llanwern, and Colorcoat® manufacture at Shotton, the data collection was not only organised by site, but also by each process line within the site. In this way it was possible to attribute resource use and emissions to each process line, and using processed tonnage data for that line, also attribute resources and emissions to specific products. For the manufacture of the cladding system, process data was also collected from the manufacturing line on the Euroclad Group site in Cardiff.

2.3 Technical data and specifications

The general properties of the product are shown in Table 2, and the technical specifications of the product are presented in Table 3.

2.4 Packaging

The panels are packaged using expanded polystyrene bumper strips and bearers, MDF boards, and shrink wrap plastic film in order to protect them during delivery to site and prior to installation.

2.5 Reference service life

Steel faced insulated panels have a design life dependant on a number of factors including the building use, location, weather conditions and the specification of the pre-finished steel product.

Products specified with Colorcoat HPS200 Ultra® are designed to withstand even the most demanding and aggressive environments and are used in a wide range of industrial and commercial buildings, providing super durability and corrosion resistance.

Three layer Colorcoat Prisma® not only uniquely pushes the boundaries for UV performance but also outperforms the highest European corrosion resistance standards ^[18] and makes it ideal for commercial, retail, warehouse, public sector and superior aesthetic buildings which are built to last.

Tata Steel offer a Confidex® Guarantee directly to the industrial/commercial building owner for the weather side of both of these pre-finished steel products. Confidex® offers the longest and most comprehensive guarantee for pre-finished steel available in Europe. Colorcoat Prisma® and Colorcoat HPS200 Ultra® are guaranteed for up to 40 years. The exact length of the guarantee is project specific and depends upon the building location, use and colour. Appropriate inspection and maintenance can significantly extend the functional life of the panels beyond this period. Further details of the Confidex® Guarantee are available at www.colorcoat-online.com

Table 2 General characteristics and specification of the panel

Europanel F5 Extra 125mm wall system	
Thickness of the outer sheet (mm)	0.70 (Class 1) ^[25]
Thickness of the liner sheet (mm)	0.50 (Class 1) ^[25]
Core thickness of insulation (mm)	125
Cover width (mm)	600 -1200 (in 1mm increments)
U-value (W/m²K)	0.33
Panel weight (kg/m²)	24.7
CE marking	EBL1003-CPR-2013-07-01 to EN14509 ^[10]
Certification	Certifications applicable to Euroclad Group Cardiff site are; ISO 9001 ^[11] , ISO 14001 ^[12] BES 6001 certification ^[13] LPCB Ext-A and Ext-B ^[8] FM Approvals 4880, 4881 and 4882 ^[9]

Table 3 Technical specification of Colorcoat®

Colorcoat® pre-finished steel	
Metallic coating	Colorcoat Prisma® and Colorcoat HPS200 Ultra® are supplied with Galvalloy® metallic coating which is manufactured using a mix of 95% Zinc and 5% Aluminium that conforms to EN 10346:2015 ^[14]
Paint coating (organic)	Colorcoat HPS200 Ultra® or three layer Colorcoat Prisma® external face Colorcoat® PE25 internal face All pre-finished steel products are fully REACH ^[15] compliant and chromate free
Certification	Certifications applicable to Tata Steel's Shotton site are; ISO 9001 ^[11] , ISO 14001 ^[12] , OHSAS 18001 ^[16] BBA certification (Colorcoat®) ^[17] BES 6001 certification ^[13] RC5, Ruv4, CPI5 certificates in accordance with EN 10169 ^[18]

3 LCA methodology

3.1 Declared unit

The unit being declared is 1m² of insulated panel and the panel composition is detailed in Table 4.

3.2 Scope

This EPD can be regarded as Cradle-to-Gate (with options) and the modules considered in the LCA are;

A1-3: Production stage (Raw material supply, transport to production site, manufacturing)

A4 & A5: Production stage (Transport to the construction site and installation)

B1-5: Use stage (related to the building fabric including maintenance, repair, replacement)

C1-4: End-of-life (Deconstruction, transport, processing for recycling & reuse and disposal)


D: Reuse, recycling and recovery

The life cycle stages are explained in more detail in Figure 2.

Table 4 Material composition of insulated panel per declared unit

Material declaration	
Declared unit (m ²)	1
Insulation (kg)	15.0
Steel (kg)	9.60
Fixings & brackets (kg)	0.09

Figure 2 Life Cycle Assessment of insulated panel system

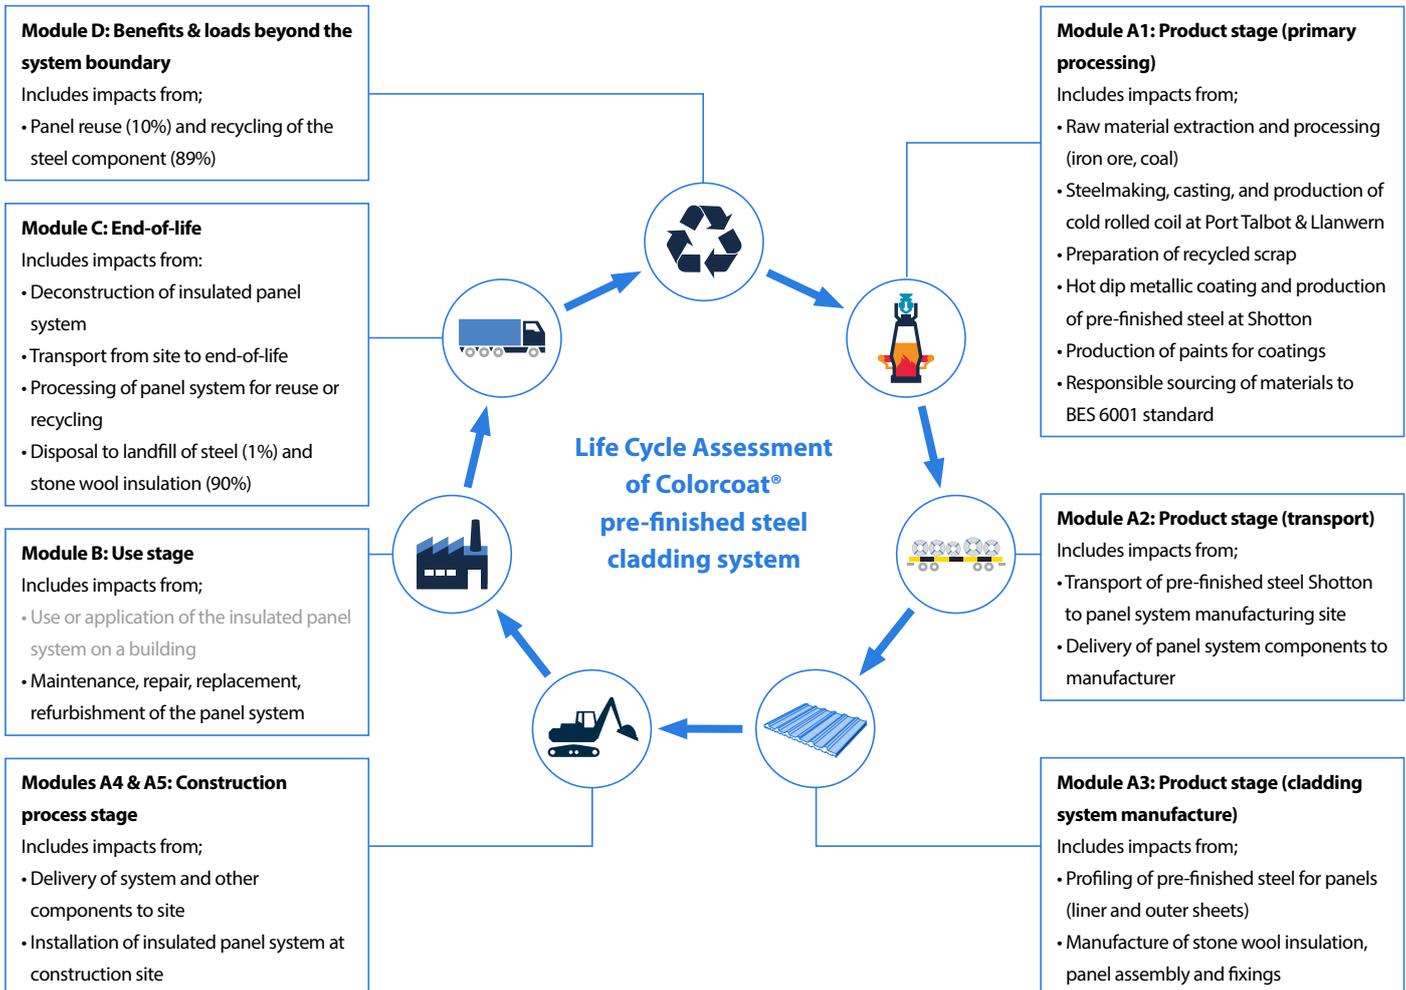

3.3 Cut-off criteria

All information from the data collection process has been considered, covering all used and registered materials, and all fuel and energy consumption. On-site emissions were measured and those emissions have been considered. Data for all relevant sites were thoroughly checked and also cross-checked with one another to identify potential data gaps. No processes, materials or emissions that are known to make a significant contribution to the environmental impact of the insulated panel system have been omitted. On this basis, there is no evidence to suggest that input or outputs contributing more than 1% to the overall mass or energy of the system, or that are environmentally significant, have been omitted. It is estimated that the sum of any excluded flows contribute less than 5% to the impact assessment categories. The manufacturing of required machinery and other infrastructure is not considered in the LCA.

3.4 Background data

For life cycle modelling of the panel system, the GaBi Software System for Life Cycle Engineering is used^[19]. The GaBi database contains consistent and documented datasets which can be viewed in the online GaBi documentation^[20].

Where possible, specific data derived from the production processes of Tata Steel and Euroclad Group were the first choice to use where available. Data was also obtained directly from the relevant suppliers, such as the paint which is used in the coating process.

To ensure comparability of results in the LCA, the basic data of the GaBi database were used for energy, transportation and auxiliary materials.

3.5 Data quality

The data from the production processes of Tata Steel and Euroclad Group are from 2013 and 2016, and the technologies on which these processes were based during that period, are those used at the date of publication of this EPD. All relevant background datasets are taken from the GaBi software database, and the last revision of all but three of these data sets took place less than 10 years ago. However, the contribution to impacts of these three datasets is small and relatively insignificant, and therefore, the study is considered to be based on high quality data.

3.6 Allocation

To align with the requirements of EN 15804, a methodology is applied to assign impacts to the production of slag and hot metal from the blast furnace (co-products from steel manufacture), that was developed by the World Steel Association and EUROFER^[21]. This methodology is based on physical and chemical partitioning of the manufacturing process, and therefore avoids the need to use allocation methods, which are based on relationships such as mass or economic value. It takes account of the manner in which changes in inputs and outputs affect the production of co-products and also takes account of material flows that carry specific inherent properties. This method is deemed to provide the most representative method to account for the production of blast furnace slag as a co-product.

Economic allocation was considered, as slag is designated as a low value co-product under EN 15804. However, as neither hot metal nor slag are tradable products upon leaving the blast furnace, economic allocation would most likely be based on estimates. Similarly

BOF slag must undergo processing before being used as a clinker or cement substitute. The World Steel Association and EUROFER also highlight that companies purchasing and processing slag work on long term contracts which do not follow regular market dynamics of supply and demand.

Process gases arise from the production of the continuously cast steel slabs at Port Talbot and are accounted for using the system expansion method. This method is also referenced in the same EUROFER document and the impacts of co-product allocation, during manufacture, are accounted for in the product stage (Module A1).

End-of-life assumptions for recovered steel and steel recycling are accounted for as per the current methodology from the World Steel Association 2017 Life Cycle Assessment methodology report^[22]. A net scrap approach is used to avoid double accounting, and the net impacts are reported as benefits and loads beyond the system boundary (Module D).

In order to avoid allocation between different coatings produced from the same line, specific data for the manufacture of each paint type was obtained, and the amount of paint applied was considered, based upon the thickness of the coating.

3.7 Additional technical information

The main scenario assumptions used in the LCA are detailed in Table 5. The end-of-life percentages are taken from a Tata Steel/ EUROFER recycling and reuse survey of UK demolition contractors carried out in 2014 ^[23].

The environmental impacts presented in the 'LCA Results' section (4) are expressed with the impact category parameters of Life Cycle Impact Assessment (LCIA) using characterisation factors. The LCIA method used is CML 2001-April 2013 ^[24].

3.8 Comparability

Care must be taken when comparing EPDs from different sources. EPDs may not be comparable if they do not have the same functional unit or scope (for example, whether they include installation allowances in the building), or if they do not follow the same standard such as EN 15804. The use of different generic datasets for upstream or downstream processes that form part of the product system may also mean that EPDs are not comparable.

Comparisons should ideally be integrated into a whole building assessment, in order to capture any differences in other aspects of the building design that may result from specifying different products. For example, a more durable product would require less maintenance and reduce the number of replacements and associated impacts over the life of the building.

Table 5 Main scenario assumptions

Module	Scenario assumptions
A1 to A3 – Product stage	Manufacturing data from Tata Steel sites at Port Talbot, Llanwern and Shotton are used, as well as data from Euroclad Group in Cardiff
A2 – Transport to the panel manufacturing site	The Colorcoat® manufacturing facility is located on the Shotton site. The steel coils are transported from here, 240km by road on a 25 tonne payload truck. A utilisation factor of 45% was assumed to account for empty returns
A4 – Transport to the construction site	A transport distance of 250km by road on a 25 tonne capacity truck, was considered representative of a typical installation. A utilisation factor of 25% was assumed to account for empty returns
A5 – Installation at construction site	This is based on data collected from 10 typical UK installations by a Tata Steel supply chain partner for the installation of cladding systems on site. The fixing screws are made from stainless steel
B1 to B5 – Use stage	This stage includes any maintenance or repair, replacement or refurbishment of the panels over the life cycle. This is not required for the duration of the reference service life of the panels
C1 – Deconstruction & demolition	Deconstruction is primarily removal of the panels from the building and is also based upon supply chain partner data
C2 – Transport for recycling, reuse, and disposal	A transport distance of 100km to landfill or to a recycling site is assumed, while a distance of 250km is assumed for reuse. Transport is on a 25 tonne load capacity lorry with 20% utilisation to account for empty returns
C3 – Waste processing for reuse, recovery and/or recycling	The insulated panels that are recycled, are processed in a shredder. There is no additional processing of material for reuse
C4 – Disposal	At end-of-life, 1% of the steel and 90% of the insulation is disposed in a landfill, in accordance with the findings of an NFDC survey
D – Reuse, recycling, energy recovery	At end-of-life, 89% of the steel is recycled and 10% of the panels (steel and insulation) are reused, in accordance with the findings of an NFDC survey

4 Results of the LCA

Description of the system boundary

Product stage			Construction stage		Use stage							End-of-life stage				Benefits and loads beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse Recovery Recycling
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	X	X	X	X	X	MND	MND	X	X	X	X	X

X = Included in LCA; MND = module not declared

Environmental impact:

1m² of Europanel F5 Extra 125mm

Parameter	Unit	A1 – A3	A4	A5	B1 - B5	C1	C2	C3	C4	D
GWP	kg CO ₂ eq	4.96E+01	8.23E-01	7.59E-01	0.00E+00	2.21E-01	4.62E-01	2.60E-01	2.17E-01	-1.74E+01
ODP	kg CFC11 eq	1.14E-06	1.43E-14	1.87E-13	0.00E+00	3.84E-15	8.01E-15	1.12E-11	4.91E-14	-4.48E-08
AP	kg SO ₂ eq	1.74E-01	2.08E-03	6.25E-03	0.00E+00	2.13E-03	1.19E-03	7.71E-04	1.28E-03	-4.18E-02
EP	kg PO ₄ ³⁻ eq	2.01E-02	4.96E-04	1.03E-03	0.00E+00	4.58E-04	2.85E-04	7.35E-05	1.77E-04	-3.86E-03
POCP	kg Ethene eq	1.97E-02	-8.01E-04	6.83E-04	0.00E+00	2.93E-04	-4.63E-04	5.33E-05	9.96E-05	-7.58E-03
ADPE	kg Sb eq	2.06E-03	1.25E-08	1.71E-05	0.00E+00	3.37E-09	7.04E-09	1.07E-07	8.31E-08	-2.42E-04
ADPF	MJ	5.88E+02	1.11E+01	9.72E+00	0.00E+00	2.98E+00	6.21E+00	3.72E+00	2.80E+00	-1.78E+02

GWP = Global warming potential

ODP = Depletion potential of stratospheric ozone layer

AP = Acidification potential of land & water

EP = Eutrophication potential

POCP = Formation potential of tropospheric ozone photochemical oxidants

ADPE = Abiotic depletion potential for non-fossil resources

ADPF = Abiotic depletion potential for fossil resources

Resource use:

1m² of Europanel F5 Extra 125mm

Parameter	Unit	A1 – A3	A4	A5	B1 - B5	C1	C2	C3	C4	D
PERE	MJ	5.11E+01	3.59E-01	9.19E-01	0.00E+00	9.66E-02	2.02E-01	1.56E+00	3.60E-01	2.79E+00
PERM	MJ	4.71E-01	0.00E+00	-4.71E-02						
PERT	MJ	5.16E+01	3.59E-01	9.19E-01	0.00E+00	9.66E-02	2.02E-01	1.56E+00	3.60E-01	2.74E+00
PENRE	MJ	6.16E+02	1.19E+01	1.08E+01	0.00E+00	3.20E+00	6.68E+00	5.76E+00	3.13E+00	-1.79E+02
PENRM	MJ	4.55E+01	0.00E+00	-4.55E+00						
PENRT	MJ	6.62E+02	1.19E+01	1.08E+01	0.00E+00	3.20E+00	6.68E+00	5.76E+00	3.13E+00	-1.84E+02
SM	kg	1.00E+00	0.00E+00	-7.77E+00						
RSF	MJ	2.36E-04	5.50E-30	4.19E-19	0.00E+00	1.48E-30	3.09E-30	0.00E+00	4.40E-23	-8.17E-05
NRSF	MJ	2.26E-03	8.35E-29	5.31E-18	0.00E+00	2.24E-29	4.68E-29	0.00E+00	5.17E-22	-6.85E-04
FW	m ³	2.12E-01	1.02E-03	3.77E-03	0.00E+00	2.74E-04	5.72E-04	3.37E-03	1.51E-02	-9.29E-02

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials

PERM = Use of renewable primary energy resources used as raw materials

PERT = Total use of renewable primary energy resources

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total use of non-renewable primary energy resources

SM = Use of secondary material

RSF = Use of renewable secondary fuels

NRSF = Use of non-renewable secondary fuels

FW = Use of net fresh water

Output flows and waste categories:

1m² of Europanel F5 Extra 125mm

Parameter	Unit	A1 – A3	A4	A5	B1 – B5	C1	C2	C3	C4	D
HWD	kg	3.51E-02	0.00E+00	-3.51E-03						
NHWD	kg	2.16E+00	0.00E+00	2.46E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.36E+01	-2.16E-01
RWD	kg	1.04E-02	1.21E-05	1.48E-04	0.00E+00	3.26E-06	6.80E-06	6.90E-04	4.21E-05	-1.04E-03
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.50E+00	0.00E+00	0.00E+00	0.00E+00
MFR	kg	2.46E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.57E+00	0.00E+00	-2.47E-01
MER	kg	5.45E-03	0.00E+00	-5.45E-04						
EEE	MJ	0.00E+00								
EET	MJ	0.00E+00								

HWD = Hazardous waste disposed

NHWD = Non-hazardous waste disposed

RWD = Radioactive waste disposed

CRU = Components for reuse

MFR = Materials for recycling

MER = Materials for energy recovery

EEE = Exported electrical energy

EET = Exported thermal energy

5 Interpretation of results


Figure 3 shows the relative contribution per life cycle stage for each of the seven environmental impact categories for 1m² of Euroclad Group's Europanel F5 Extra 125mm product. Each column represents 100% of the total impact score, which is why all the columns have been set with the same length. A burden is shown as positive (above the 0% axis) and a benefit is shown as negative (below the 0% axis). The main contributors across all impact categories are A1-A3 (burdens) and D (benefits beyond the system boundary).

The manufacture of the cold rolled coil during stage A1-A3 is responsible for between 60% and 70% of each impact in most of the categories, specifically, the conversion of iron ore into liquid steel which is the most energy intensive part of the cladding manufacturing process. The manufacture of the stone wool insulation, together with the main components of the adhesive (isocyanate and polyol), are also significant contributors to each environmental impact. This is generally responsible for between 20% and 30% of the A1-A3 total, and almost 40% of this total in the GWP category. The exception to this is the Ozone Depletion Potential (ODP) indicator, where the manufacture of the wool insulation and adhesive are responsible for over 50% of the total impact in the form of tetrachloromethane.

The primary site emissions come from the use of coal and coke in the blast and basic oxygen furnaces as well as combustion of the process gases. These processes, together with the wool insulation manufacture, give rise to emissions of CO₂, which contributes 95% of the Global Warming Potential (GWP), and sulphur oxides, which are responsible for over half of the impact in the Acidification Potential (AP) category. In addition, oxides of nitrogen are emitted which contribute almost 25% of the A1-A3 Acidification Potential, and 50% of the Eutrophication Potential (EP), and ammonia, which is also significant. The combined emissions of sulphur and nitrogen oxides, together with emissions of carbon monoxide, methane, and VOCs all contribute to the Photochemical Ozone indication (POCP).

Figure 3 clearly indicates the relatively small contribution to each impact from the other life cycle stages, A4 and A5, and C1 through to C4. Of these stages, the most significant contributions are from stages A4 (transport to construction site) and A5 (installation of the product on the building), to the Acidification (AP) and Eutrophication (EP) Potentials. This is mainly the result of nitrogen oxides emissions from the combustion of diesel fuel used in road transport (A4) and to power site machinery such as fork lift trucks, scissor lifts and cherry pickers (A5). The emission of sulphur dioxide also contributes to the acidification potential indicator for A5, with approximately 20% of this impact coming from the manufacture of the stainless steel screws that fix the cladding to the building.

Figure 3 LCA results for the cladding system

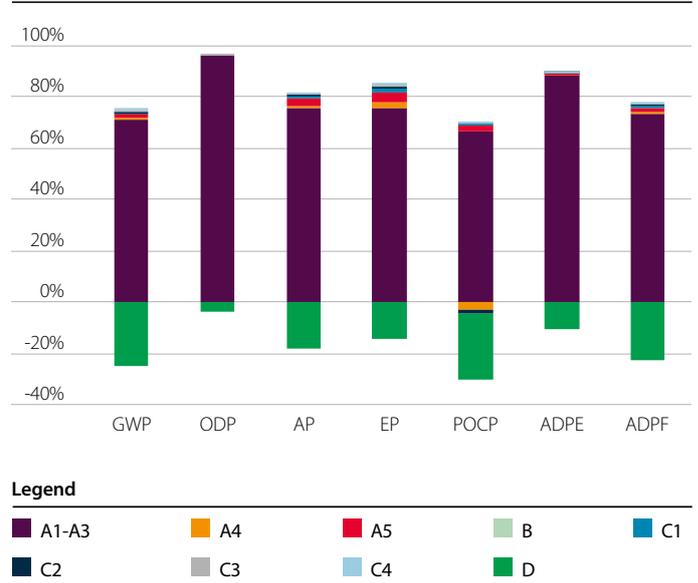

Module D values are largely derived using worldsteel's value of scrap methodology which is based upon many steel plants worldwide, including both BF/BOF and EAF steel production routes. At end-of-life, the recovered steel cladding is modelled with a credit given as if it were re-melted in an Electric Arc Furnace and substituted by the same amount of steel produced in a Blast Furnace^[22]. This contributes a significant reduction to most of the environmental impact category results, with the specific emissions that represent the burden in A1-A3, essentially the same as those responsible for the impact reductions in Module D.

Referring to the LCA results, the impact in Module D for the Use of Renewable Primary Energy indicator (PERT) is different to other impact categories, being a burden or load rather than a benefit. Renewable energy consumption is strongly related to the use of electricity, during manufacture, and as the recycling (EAF) process uses significantly more electricity than primary manufacture (BF/BOS), there is a positive value for renewable energy consumption in Module D but a negative value for non-renewable energy consumption.

6 References and product standards

1. Tata Steel's EN 15804 verified EPD programme, General programme instructions, Version 1.0, January 2017
2. Tata Steel's EN 15804 verified EPD programme, Product Category Rules Part 1, Version 1.0, January 2017
3. Tata Steel's EN 15804 verified EPD programme, Product Category Rules Part 2 – Steel Cladding Systems, Version 1.0, July 2018
4. ISO 14044:2006, Environmental management - Life Cycle Assessment - Requirements and guidelines
5. ISO 14025:2010, Environmental labels and declarations - Type III environmental declarations - Principles and procedures
6. ISO 14040:2006, Environmental management - Life Cycle Assessment - Principles and framework
7. EN 15804:2012+A1:2013, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
8. Loss Prevention Certification Board (LPCB) – External envelope fire performance grade A and B
9. Factory Mutual (FM) Approvals – standards 4880 (Class 1 fire rating of building panels or interior finish materials) and 4881 (Class 1 exterior wall systems), FM Global, mutual insurance company, USA
10. EN 14509:2013, Self-supporting double skin metal faced insulating panels
11. ISO 9001:2015, Quality management systems
12. ISO 14001:2015, Environmental management systems
13. BES 6001, Responsible sourcing of construction products
14. EN 10346:2015, Continuously hot-dip coated steel flat products for cold forming
15. REACH, EU regulation for Registration, evaluation, authorisation and restriction of chemicals
16. BS OHSAS 18001, Occupational health and safety management
17. BBA Certification, British Board of Agrément product certification
18. EN 10169:2010+A1:2012, Continuously organic coated (coil coated) steel flat products
19. thinkstep; GaBi: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2018
20. Documentation of GaBi: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2018
<http://documentation.gabi-software.com>
21. EUROFER in cooperation with the World Steel Association, 'A methodology to determine the LCI of steel industry co-products', February 2014
22. World Steel Association: Life Cycle Assessment methodology report, 2017
23. Sansom M and Avery N, Reuse and recycling rates of UK steel demolition arisings, Proceedings of the Institution of Civil Engineers Engineering Sustainability 167, June 2014, Issue E53, (Tata Steel/ EUROFER survey of members of the National Federation of Demolition Contractors (NFDC) for 'Profiled sheet cladding')
24. CML LCA methodology, Institute of Environmental Sciences (CML), Faculty of Science, University of Leiden, Netherlands
25. EN 508-1:2014, Roofing and cladding products from metal sheet. Specification for self-supporting of steel, aluminium or stainless steel sheet. Steel





DEBENHAMS

www.tatasteelconstruction.com

Trademarks of Tata Steel

Colorcoat, Colorcoat Connection, Colorcoat HPS200 Ultra, Colorcoat Prisma, Confidex, and Galvalloy are trademarks of Tata Steel.

While care has been taken to ensure that the information contained in this publication is accurate, neither Tata Steel, nor its subsidiaries, accept responsibility or liability for errors or for information which is found to be misleading.

Before using products or services supplied or manufactured by Tata Steel and its subsidiaries, customers should satisfy themselves as to their suitability.

Copyright 2019

Tata Steel

Shotton Works
Deeside
Flintshire
CH5 2NH
United Kingdom
T: +44 (0) 1244 812345

Euroclad Group Ltd

Wentloog Corporate Park
Cardiff
CF3 2ER
United Kingdom
T: +44 (0) 29 20 77 66 77
E: panel.technical@eurocladgroup.com
www.eurocladgroup.com

Colorcoat Connection® helpline

T: +44 (0) 1244 892434
E: colorcoat.connection@tatasteeeurope.com

Tata Steel UK Limited is registered in England under number 2280000 with registered office at 30 Millbank, London, SW1P 4WY.

Language English UK 0119